




Feature :

- . RJ45 8P8C JACK
- . CAT6 ISO 11801 OR TIA/EIA 568C
- . IDC compatible with 110 tool
- . Terminating 4 pairs, 22-26 AWG cable
- . Colour coded for T568A and T568B wiring schemes
- . Fits into keystone panel or faceplates
- . System Warranty


Material:

- . RJ45 Jack Housing : ABS + PC White colour
- . RJ45 Jack Contact : Material : Phosphor bronze , Nickel plated , gold plated on plug contact area
- . IDC Housing : PC
- . IDC : Terminal: Phosphor bronze, Tin plated
- . IDC Cap : PC transparent
- . PCB : FR4 , Thickness : 1.6mm

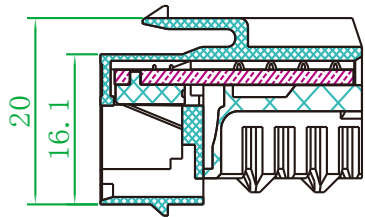

Performance:

- . Wiring specification : T568A&T568B
- . Insertion force : 20N max
- . Retention strength : 7.7Kg between Jack and Plug
- . Operating temperature: -10 °C to 60 °C
- . Life (mating cycles) : Jack : 750 cycles min
- . IDC tool : IDC : Suitable for 22-26AWG solid wire compatible with 110 punchdown tools



COVER

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	MD-111
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:
CAT 6 UTP KEYSTONE JACK
(90)

