


10 Mercury-Free Engineering Data sheet

SPECIFICATIONS

Type designation :	10DS
Nominal voltage :	1.45V
Typical capacity:	90mAh (Rated at 0.7mA continuous & 3mA / 100ms Pulses at 25°C 60%)
Average weight :	0.31g
Operating Temp :	-10°C ~ 50°C
Impedance :	≤8Ω (at AC 1KHz)
Available current :	4mA at 1.1V
IEC :	PR70
Terminals :	FLAT
Shelf life :	4 years

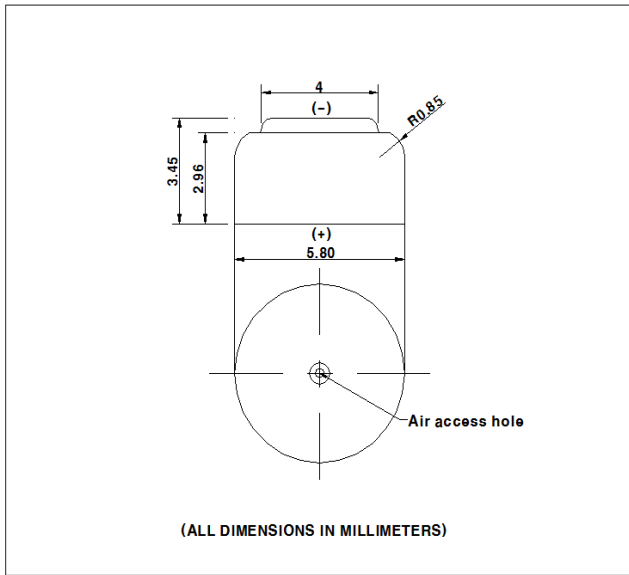


(Discharge Charts of IEC 60086-2:2011 Standards)

10 [Mercury Free Standard Test]

Pulsed load : 0,7 mA continuous & 3,0 mA/100ms Pulses


Pulse interval : 2,0 h Temp./RH : 25/60

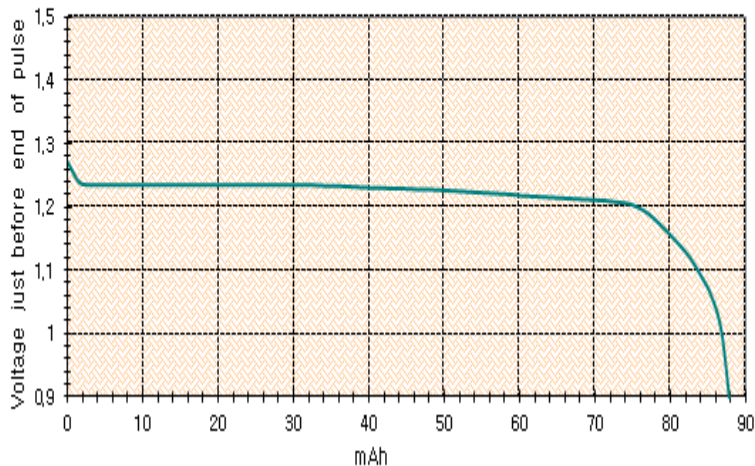

10 [Mercury Free High Drain Test]

Pulsed load : 1,0 mA continuous & 5,0 mA/100ms Pulses

Pulse interval : 2,0 h Temp./RH : 25/60

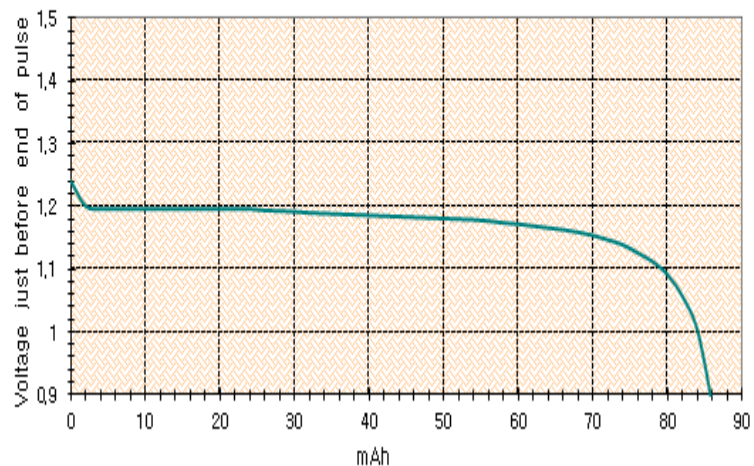

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication

Contents herein do not constitute a warranty.

Copyright **iCellTech Corp.** – All Rights Reserved